


110v Scabblor

| Weight(kg) | Height(mm) | Width(mm) | Length(m) | Hand arm vibration | Noise(db) |
|------------|------------|-----------|-----------|--------------------|-----------|
| 53 | 980 | 360 | 1200 | 5.6 | 89 |

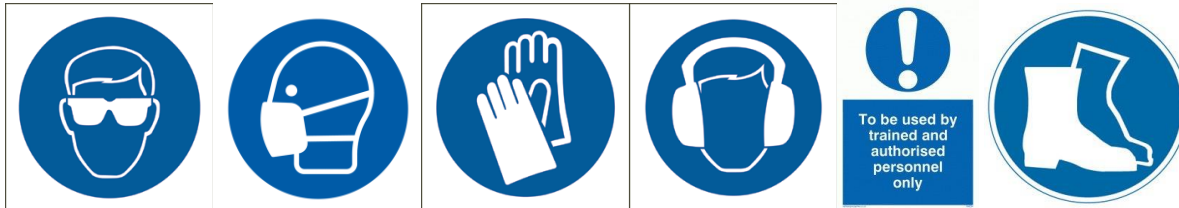

EACH TIME BEFORE USING MACHINE

This machine should only ever be used by a trained and competent person.

Upon acceptance, please check the machine has in no way been damaged in transit and works, and each time prior to use. If you have any questions or doubts, please contact us, also in the event of breakdown or damage.

Please check that all safety mechanisms and switches are intact and working correctly.

Please make sure that the floor you're about to prep is clear of all foreign objects that could cause damage to the machine or operator. This must be completed every time before using the machine.

Please check every day that all belts, bearings and moving parts are in good condition: this could lead to breakage and even injury.

USING THE MACHINE

110 volt

To start the machine, make sure the lever is lifted up and the adjustment wheel is turned anti-clockwise all the way up to take the drum off the floor. Turn the on switch over to 1 and then slightly further. The drum should start to spin.

Petrol

To start the machine, make sure the lever is lifted up and the adjustment wheel is turned anti-clockwise all the way up to take the drum off the floor. Switch the fuel lever and choke lever to on, turn the switch at the front of the machine to on and pull the pull chord so that the engine fires up. Immediately, switch the choke off. The drum should start to spin.

110 volt and Petrol

To lower the drum, drop the lever down (110 v only) and then turn the adjustment wheel clockwise in the direction of the arrows. If a deeper cut is required, make several passes in a criss-cross pattern. Attempting to make deep cuts will result in substantial down time and an expensive repair or replacement of the drum.

To stop the 110 v machine, click the switch back over to 0. On the petrol machine turn the switch at the front of the machine to 0 and return the fuel lever to the off position.

AFTER USING AND PRIOR TO RETURNING THE MACHINE

Please ensure that the machine is unplugged (110 v version) and kept in a safe place.

An off-hire will never be arranged at the beginning of the hire period. Please call the office and arrange collection as soon as you know when the machine/machines will no longer be required.

Please make sure the machine is returned in a fit and clean state to avoid charges.

If multiple machines are being collected, please have them placed neatly together, ready to collect because time may be charged if we have to search or wait for equipment.

If multiple machines are being collected, please have them placed neatly together, ready to collect because time may be charged if we have to search or wait for equipment. Items not available for collection will remain on hire and additional collection charges will apply. If the machine is to be collected by a carrier, please ensure the fuel tank is emptied (petrol version) and that it is strapped securely to the pallet using the straps that it arrived with and left somewhere obvious and preferably arrange for someone to be responsible for supervising the collection.

All information above is provided for guide line purposes only. For more accurate and reliable

Information please refer to the manufacturer.